



# Peerless Data Sheet

Type: XXLS 308 SWR 51 147 NWP ALP 4L 8 ohm - 830845



### Electrical data

Nominal impedance	Zn	8 (ohm)
Minimum imp./at freq.	Zmin	6.7/109 (ohm/Hz)
Maximum impedance	Zo	126.7 (ohm)
Dc resistance	Re	5.9 (ohm)
Voice coil inductance	Le	3.6 (mH)

### TS Parameters

Resonance Frequency	fs	21.5 (Hz)
Mechanical Q factor	Qms	9.68
Electrical Q factor	Qes	0.47
Total Q factor	Qts	0.45
Force factor	Bl	13.1 (Tm)
Mechanical resistance	Rms	1.41 (Kg/s)
Moving mass	Mms	101.4 (g)
Suspens. compliance	Cms	0.54 (mm/N)
Effective cone diam.	D	24.4 (cm)
Effective piston area	Sd	466 (cm <sup>2</sup> )
Equivalent volume	Vas	162.5 (ltrs)
SPL 2.83V/1m at fmin		88.0 (dB)

### Power handling

100h RMS noise test (IEC)	175 (W)
Longterm Max System Power (IEC)	350 (W)
IEC268-5 noise signal is used for the powertest.	

### Voice coil and magnet parameters

Voice coil diameter	51.0 (mm)
Voice coil length	33.0 (mm)
Voice coil layers	4
Height of the gap	8.0 (mm)
Linear excursion +/-	12.5 (mm)
Max mech. excursion +/-	- (mm)
Total useful flux	2.3 (mWb)
Diameter of magnet	147 (mm)
Height of magnet	35 (mm)
Weight of magnet	2.4 (kg)

### Factors


Ratio fs/Qts	48
Ratio BL/sqrt(Re)	5.4

### Special remarks

-

### Remarks on powertest

-

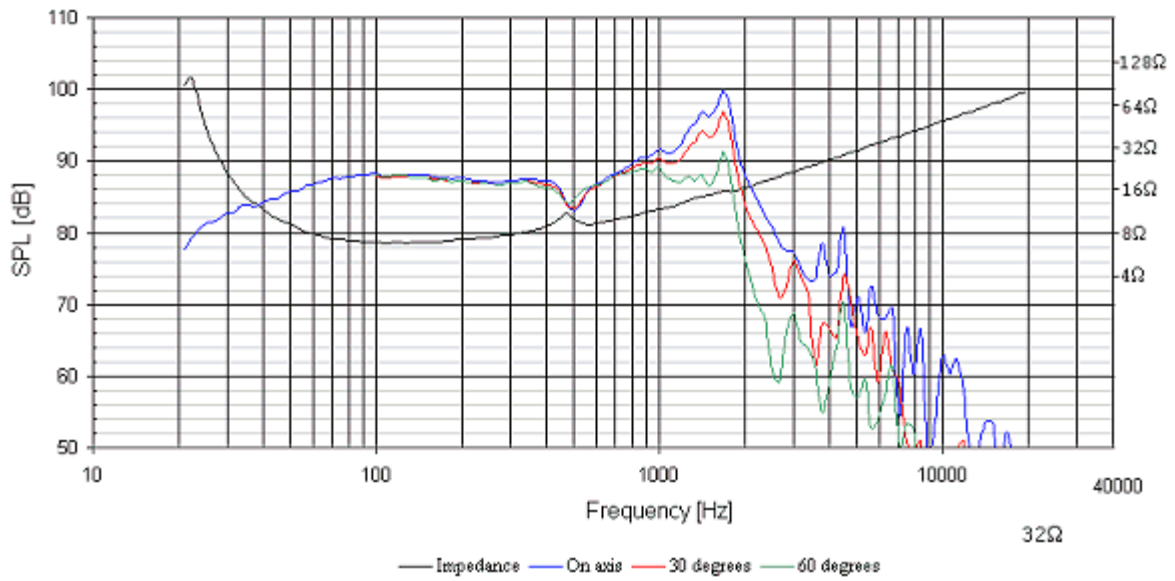

Measuring methods and conditions are stated in Peerless Standard for Acoustic Measurements (PSAM)