Keiga KG5230 Amplifier

Subwoofer Volume Level Control
(Adjust to balance with satellite speakers)

Crossover Frequency
(Adjust to blend with satellite speakers, usually 70 to 80Hz)

Phase switch 0 to 180 degrees
(Usually set to zero for positive outward stroke)

Low Pass Crossover On or Off
(Off if you will control crossover point from your receiver)

RCA In and Out (Recommended input from source. Pass through only, no filter. Use out to go to another subwoofer amplifier)

Led Light (Green is On / Red is Standby)

Speaker Level In and Out (Use when you don't have RCA outs from your source. Use out to go to another sub amplifier or to your speakers. Pass through only, no crossover filter)

We recommend using stereo inputs as the amp is louder when you do.

Amp Turn On Trigger Mode
- On for always on
- Music turns on when music is sensed
- DC 12V for use with system equipped with DV12V trigger.

Speaker Cord is on the back.
Red is positive and black is negative.

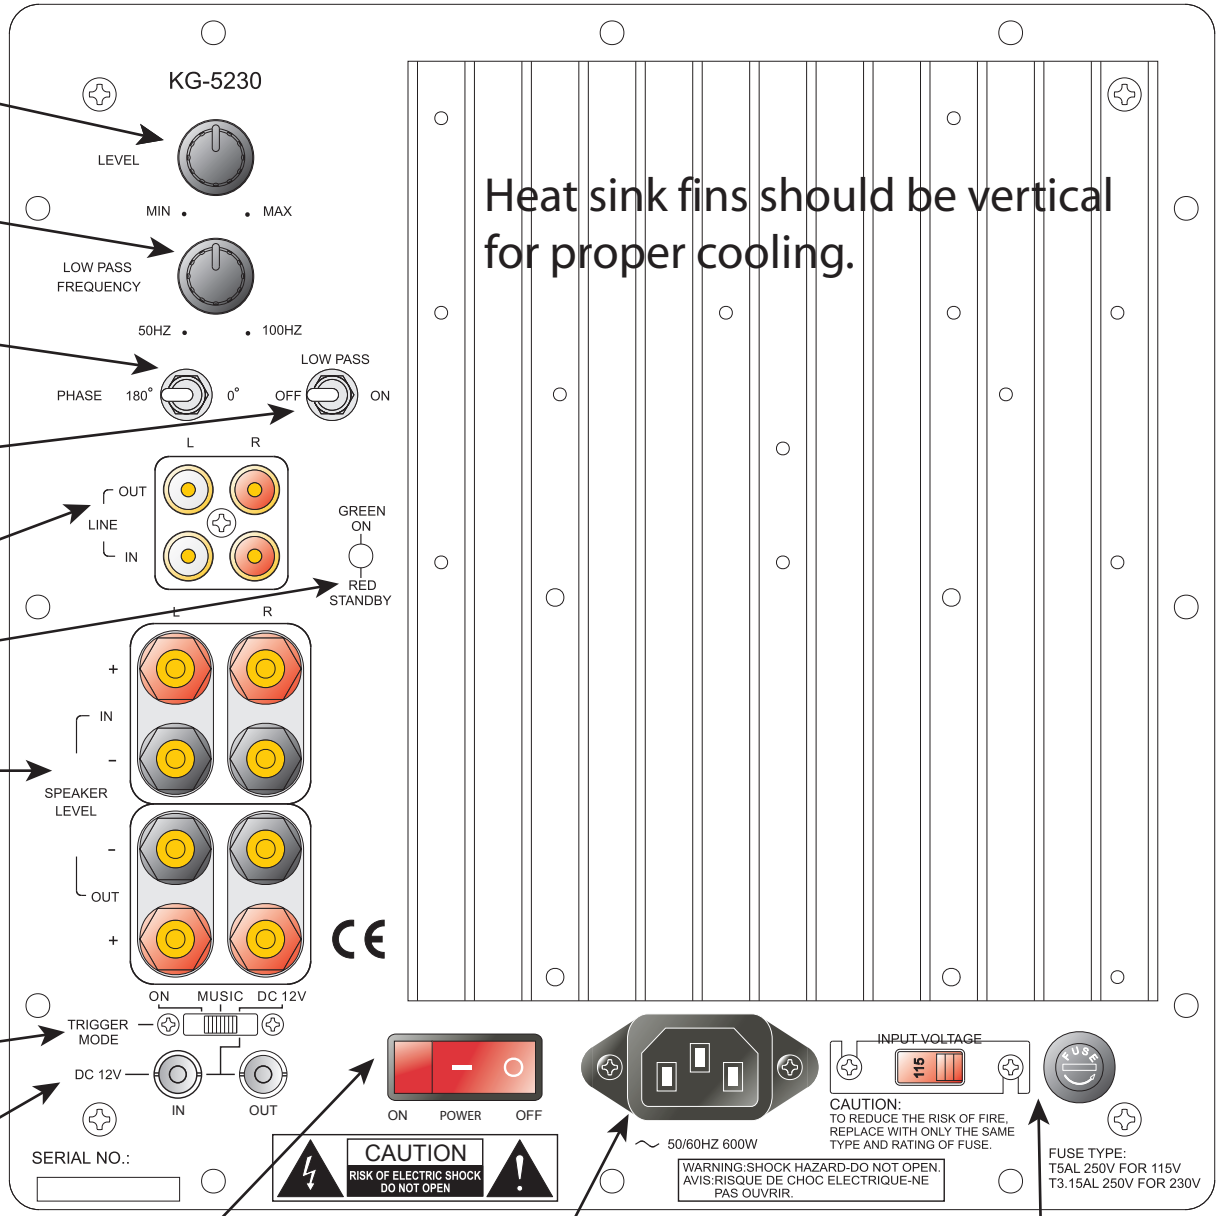

AC Power On/Off

Power Cord
(14awg)

AV Line Voltage Switch
(Change fuse for voltage selected)