



Peerless Data Sheet

Type: HDS 106 WR 26 72 PPB AL TV 8 OHM - 830854



Electrical data

Nominal impedance	Zn	8 (ohm)
Minimum imp./at freq.	Zmin	5.6/422 (ohm/Hz)
Maximum impedance	Zo	30.3 (ohm)
Dc resistance	Re	5.3 (ohm)
Voice coil inductance	Le	0.6 (mH)

TS Parameters

Resonance Frequency	fs	75.7 (Hz)
Mechanical Q factor	Qms	2.66
Electrical Q factor	Qes	0.56
Total Q factor	Qts	0.46

Force factor	Bl	5.1 (Tm)
Mechanical resistance	Rms	1.05 (Kg/s)
Moving mass	Mms	5.9 (g)
Suspens. compliance	Cms	0.76 (mm/N)
Effective cone diam.	D	8.4 (cm)
Effective piston area	Sd	55 (cm ²)
Equivalent volume	Vas	3.2 (ltrs)
SPL 2.83V/1m at fmin		86.8 (dB)

Power handling

100h RMS noise test (IEC)	- (W)
Longterm Max System Power (IEC)	- (W)
IEC268-5 noise signal is used for the powertest.	

Voice coil and magnet parameters

Voice coil diameter	26.0 (mm)
Voice coil length	12.0 (mm)
Voice coil layers	2
Height of the gap	6.0 (mm)
Linear excursion +/-	3.0 (mm)
Max mech. excursion +/-	- (mm)
Total useful flux	0.7 (mWb)
Diameter of magnet	72+72 (mm)
Height of magnet	15+10 (mm)
Weight of magnet	0.23+0.16 (kg)

Factors


Ratio fs/Qts	165
Ratio BL/sqrt(Re)	2.2

Special remarks

-

Remarks on powertest

-

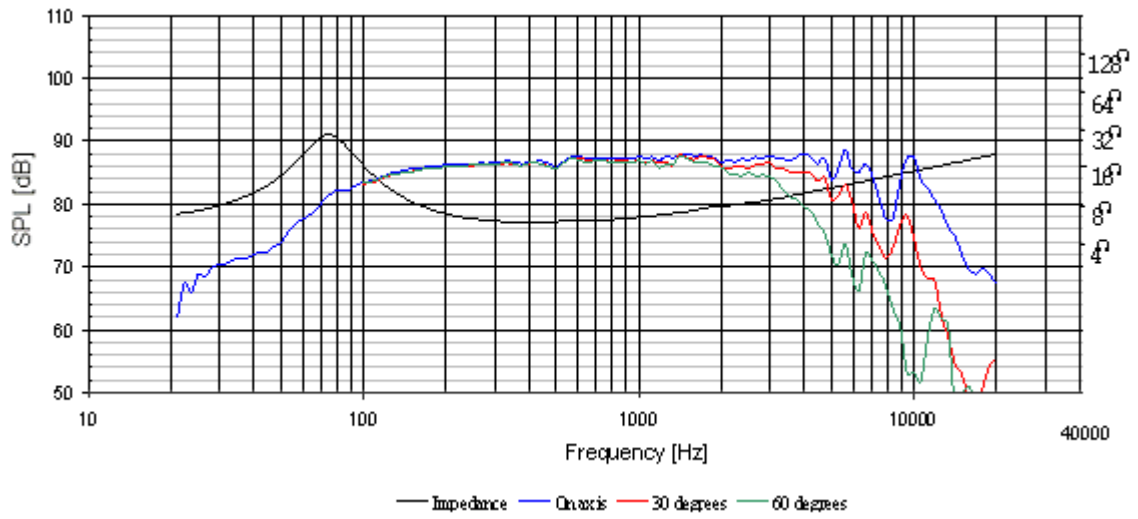

Measuring methods and conditions are stated in Peerless Standard for Acoustic Measurements (PSAM)